
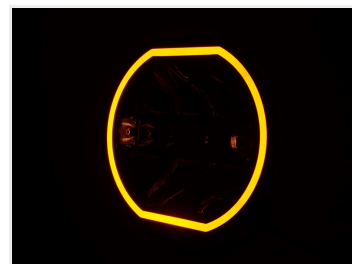


Prolumo Beam HEXA - LED high-beam, dual position-light

E-approved round 7" and 9" LED light beams with dual color position-light in "neon-effect". Allows you to switch between white and yellow position-light.



Prolumo HEXA are E-approved round LED high-beams with dual position-light, that emit light around the edges of the lamp with a "neon-effect". That gives you the possibility to change between white and yellow positions-light as you feel like it so that it fits your vehicle.

The high-beams are available as 7" (108W) and 9" (144W). They have a super bright light. These high beams have an ECE-approved and NOT E-approved (Off-road / boost) light:

7" E-approved light: 1356 raw lumen

7" Off-road / boost light: 3600-5800 raw lumen

9" E-approved light: 1798 raw lumen

9" Off-road / boost light: 6500-11000 raw lumen

The off-road function can be activated by turning on the light for 2 seconds, then turn on/off the light 3 times within 5 seconds. After successful installation, the lamp will light-up with its off-road function. To go back to the E-approved light, you will have to turn off the light for 5 seconds and proceed with the operation above. The lamp / lamps have a memory function, so that you do not have to install them from scrats.

The lens glass is produced in polycarbonate and the lamp housing is made of powder-coated aluminum to achieve a sleek design and good cooling for the LEDs.

The supplied brackets are manufactured in stainless steel. The lamps also come with a suitable DT Deutsch-plug and fitting counterpart, which makes the installation much easier.

- Black: Minus / -
- Red: High-beam
- White: White position-light
- Yellow: Yellow position-light

Buy online at:

www.matronics.eu/24606545



7" - 60W - 5800lm

SKU 24606545

LEDs: 18 x 6W

Voltage: 10-30V DC

Consumption: 108W

Operating temperature: - 40°C to +60°C

Lumen effective: 5800lm

Reference: 20

Kelvin: 5700K

Lifetime: 50000 hours

Dimensions: 71 x Ø177 x 166mm



9" - 120W - 11000lm

SKU 24606546

Dimensions: 84 x Ø233 x 218mm

Product pictures

