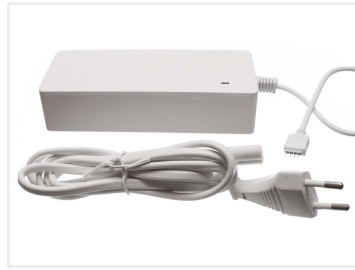# 230V ~ 12VDC RGB Transformer with WIFI, 6.250mA – 75W

Powersupply and color-controller in one unit. Saves space and is a cheaper solution. Controlled with iPhone and Android.

Compact powersupply and a color-controller, combined in to one unit. The unit saves space and is a cheaper solution, as you do not have to purchase these devices seperatly. The device is controlled with iPhone and Android, and it has many functions built in to the app.

- Controlling multiple units in one app
- Step-less adjustment of colors and brightness
- Scene-functions
- Sound-controlled colors
- Automatic on/off timer

The device is plug & play, the only thing you need to connect is the LED strip.
The last thing you need to do is to install the app on the mobile or tablet.

Buy online at:

www.matronics.eu/609350

Specifications

Input-voltage	100 - 240VAC
Output voltage	12VDC
Max power	75W
Max current	3 x 2.1A
Working temperature	-30 til 55 grader
Wifi	802.11b/g/n

230V ~ 12VDC RGB Transformer with WIFI, 6.250mA - 75W
SKU 609350
Input voltage: 100-240Vac
Output voltage: 12Vdc
Power: 75W
Temperature: - 30°C ~ 55°C
Weight: 350
Dimensions: 32 x 143 x 58mm

Product pictures

LTSYS WIFI LED DRIVER

Model: CV-7512-WF03-A

Input:
Un(V): 100~240Vac
I (in): 0.8A@230Vac
fn(Hz): 47~63Hz
Standard: GBT 24825-2009, GB19510.1, GB19510.14

Output:
Uo(V): 12Vdc
I(max): 2.1A×3CH   tc: 85°C
P(max): 75W   ta: -30°C~55°C

⚠ CAUTION
INDOOR USE ONLY
FOR USE WITH IT EQUIPMENT ONLY.
RISK OF ELECTRIC SHOCK.
DO NOT OPER.

Do not use in high temperature environments.
Long-term use in such environments will affect
the lifespan.
No covers on the surface when in use.

WiFi   3G   4G

RoHS Compliant

ZHUHAI LTECH TECHNOLOGY CO.,LTD.
Email:lt@ltechonline.com   www.ltechonline.com

1.Operating Guidance

*Connect in the direction shown

2.Scan QR Code to download the APP via mobile phone.

3.After installation, the strip flashes within 30s when powered on and then the controller is ready to the configuration status accordingly.

4.Turn on APP, enter "My Device" interface,click"+"icon.

5.Enter the interface "To select a device", choose "Color Strip" and follow the prompts to connect.

· Power on and off the CV-7512-WF03-A continuously for 5 times, restore the factory settings.

Scan to download APP

36547343

OUTPUT   + (BLACK)
R (RED)
G (GREEN)
B (BLUE)