


## Toggle switch - 2 pole, DPTD

Contact with two contact sets / two poles, that can be used for many purposes, for example to swap polarity on motors.

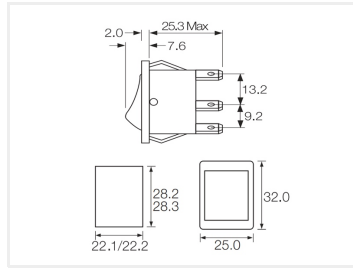

Contact with two contact sets / two poles, that can be used for many purposes, for example to swap polarity on motors.

As there are 6,3x0,8mm cable lugs on the bottom, it is very straight forward to connect.

The switch is available as standard switch on/off/on, and as a double horn-switch (on)/off/(on)

It is mounted in a panel with max 3mm thickness, and hole dimensions 30x22,1mm.

Buy online at:

[www.matronics.eu/613068](http://www.matronics.eu/613068)



### **(On) / Off / (On) horn**

SKU 613068

Max current DC: 20A (28VDC)

Max current AC: 16A (250V AC)

Panel thickness: Max 3mm

Dimensions: 26 x 30,2 x 25mm



### **On / Off / On**

SKU 613067

Max current DC: 20A (28VDC)

Max current AC: 16A (250V AC)

Panel thickness: Max 3mm

Dimensions: 26 x 30,2 x 26mm



### **Accessories, Rubber cap**

SKU 613074

Product pictures

