


# Matronics dynamisk indikator + strobe controller IO-30V

Controller with 8 channels for dynamic indicators and strobe lights. Easy connection and setups. 4 strobe functions.

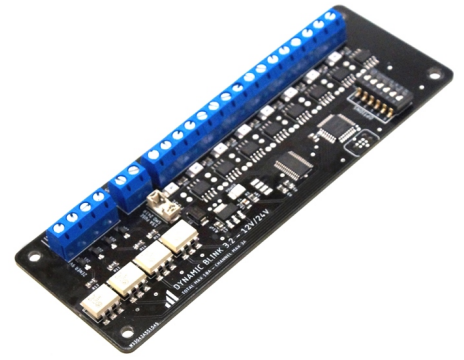

Controller with 8 channels for dynamic indicators and strobe light, as well as positions lights with possibility of dimming.

## Outputs

The controller can be set up for a different number of outputs / lamps. The controller will adjust the speed for the dynamic indicator by itself. The controller enables and disables the positive side, and it can also be used for swithing other things besides lights, eg. relay.

- 2 x 2 lamps (left/right)
- 2 x 3 lamps (left/right)
- 2 x 4 lamps (left/right)
- 5 lamps
- 6 lamps
- 7 lamps
- 8 lamps

## Inputs

There is 4 inputs that control the following:

- Indicator right
- Indicator left
- Position lights
- Strobe light

## Settings

You can adjust the following with the DIP switches on the controller:

- Number of channels (2x2 to 8 lamps)
- Dimmed position lights and strobe effects with dimming
- Strobe effects (4 available)

The controller is available with and without enclosure (150 x 100 x 45mm)

## Fuse and protection


There is a 15A fuse (size 2410) on the controller, but the individual outputs are electronically protected against short circuits and overloaded current. We recommend a max of 3A per output, but max total 12A.

matronics

Buy online at [www.matronics.eu/762210](http://www.matronics.eu/762210)


# Product overview

## Without enclosure



SKU 762210

## With enclosure



SKU 762211

# Product pictures

