


## Prostroke Ultra Slim LED Light Bar yellow - R65

The R65-approved Prostroke Ultra Slim is an extremely thin LED light bar at 2,5cm in height. cruisemode and multiple lengths.

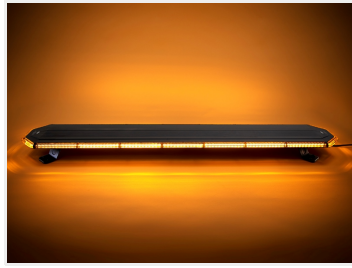

Powerful and sturdy LED light bar from Prostroke. The light bar is made of polycarbonate and a strong extruded aluminum profile. The powerful LED modules along the edge and at the ends provide you with maximum 360-degree visibility around the entire vehicle.

Buy online at:

[www.matronics.eu/500861](http://www.matronics.eu/500861)

## Approvals

All models are ECE R65 TA2 (warning light), ECE R10 (EMC), CISPR25 CLASS 3, and SAE J845 approved. Therefore, they can be used on public roads.

## Construction

Each LED module has 4 powerful high power 3W LEDs built-in, and with the effective optics in the lens, you get a wide and powerful light spread. The modules are embedded and therefore completely sealed (IP67), making them fully protected against water ingress.

The light bar has many flash patterns, as well as built-in night dimming and cruise mode function where the light is on with reduced brightness.

## Mounting

Feet for roof mounting and brackets for roof-edge mounting as well as bolts, nuts, and washers for fastening are included. The construction of the light bar makes it easy to place and move the feet as needed.

## Connection

There is a 5m cable attached to all models.

- Red = Plus +
- Black = Minus -
- Yellow = Flash pattern to plus + for 3 seconds and the light bar turns on
- White = Night dimming\*

\* There is no night dimming on 500866 (183cm) but on all other models/lengths.

## Accessories, remote control

The charging time is approximately 2 hours.

## Coding

If you wish to use the remote control with the light bar, they need to be coded together. This is done by holding the "SOS" button on the remote control for about 3 seconds. This should be done within 10 seconds after the light bar is powered. If the light bar acknowledges with 3 quick flashes, the coding is complete. Finally, press the "SOS" button quickly once more to unlock the remote control.



**Light bar, 61.5cm**

SKU 500861

Consumption: 74W - 12V/6.17A - 24V/3.08A

Voltage: 12-24V



**Light bar, 107cm**

SKU 500863



**Light bar, 137.5cm**

SKU 500867



**Light bar, 183cm**

SKU 500866



**Light bar, 77cm**

SKU 500862



**Light bar, 122cm**

SKU 500864



**Light bar, 153cm**

SKU 500865



**Accessory, Remote controller**

SKU 500860

Product pictures

